
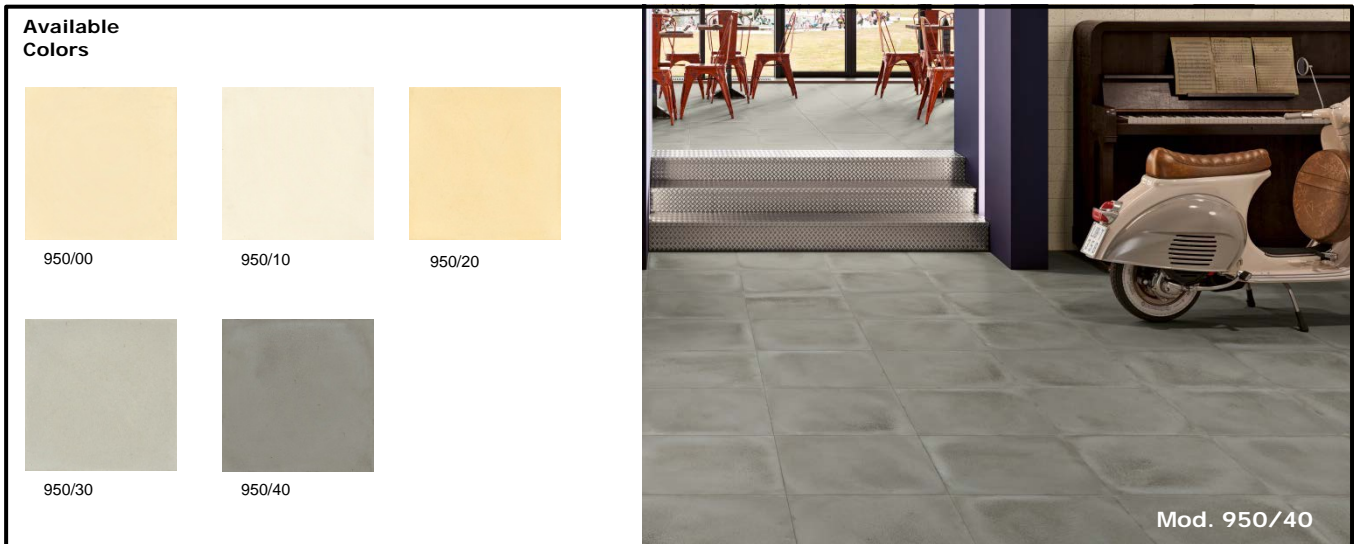


INCONCRETE SMOOTH FLOORING (MOD. 950)


Units: mm

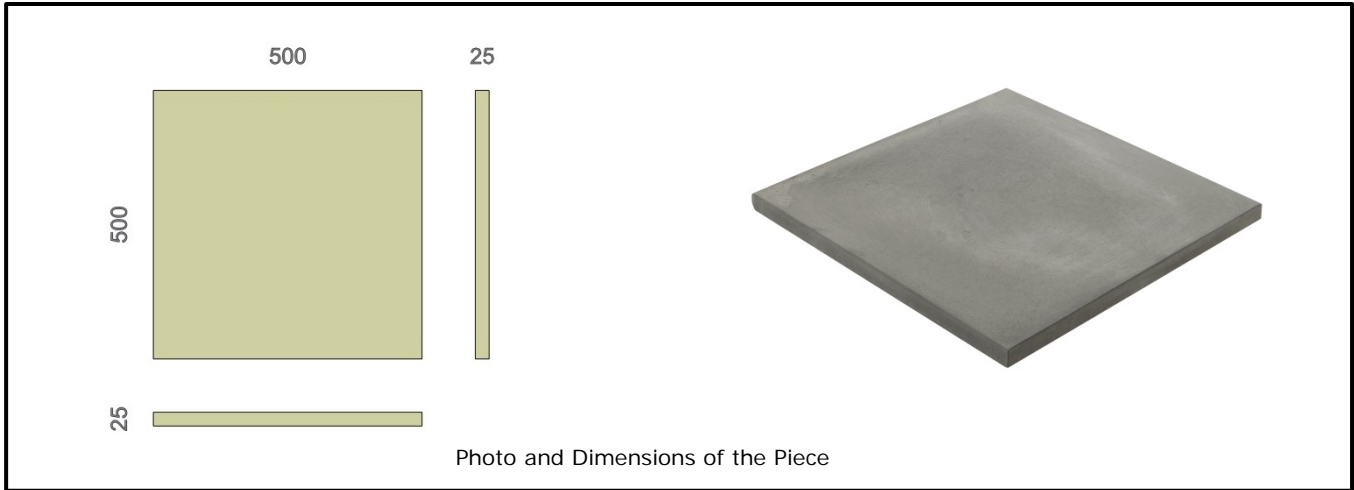

Product characteristics and package		Technical Specifications		
		EN 1339 – “Concrete paving flags – Requirements and test methods”		
		Intended use	Internal Flooring	External Flooring
Dimensions	500 x 500 x 25	Emission of asbestos	Pass	Not Relevant
Quantity per Pallet	20 sqm	Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Quantity per sqm	4 units	Slip/ Skid Resistance	Satisfactory	Satisfactory
Items/Pallet	80 units	Thermal Conductivity [W/(mk)]	1,24	Not Relevant
Average weight/Items	13,75 kg	External fire performance	Not Relevant	Not Relevant
Average weight/sqm	55 kg	Durability	Satisfactory	Satisfactory
Average weight/Pallet	1106 kg	Reaction to fire	Classe A1	Not Relevant
Approved Vitor Silva	Elaborate Bruno Veloso	PTDS n°: PAV_950_EN	Date 26-09-2019	

INCONCRETE HAMMERED FLOORING (MOD. GR 950)

Units: mm

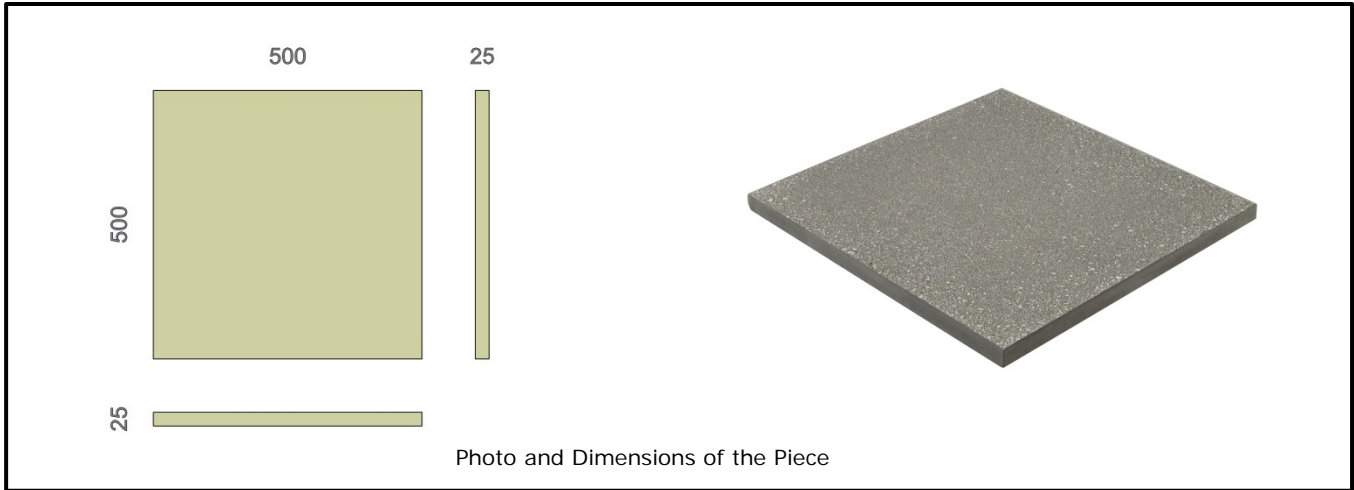


Available Colors



Product characteristics and package		Technical Specifications		
		EN 1339 – “Concrete paving flags – Requirements and test methods”		
		Intended use	Internal Flooring	External Flooring
Dimensions	500 x 500 x 25	Emission of asbestos	Pass	Not Relevant
Quantity per Pallet	20 sqm	Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Quantity per sqm	4 units	Slip/ Skid Resistance	Satisfactory	Satisfactory
Items/Pallet	80 units	Thermal Conductivity [W/(mk)]	1,24	Not Relevant
Average weight/Items	13,75 kg	External fire performance	Not Relevant	Not Relevant
Average weight/sqm	55 kg	Durability	Satisfactory	Satisfactory
Average weight/Pallet	1106 kg	Reaction to fire	Classe A1	Not Relevant
Approved Vitor Silva	Elaborate Bruno Veloso	PTDS n°: PAV_GR950_EN	Date 26-09-2019	

INCONCRETE BUBBLES FLOORING (MOD. 951)

Units: mm

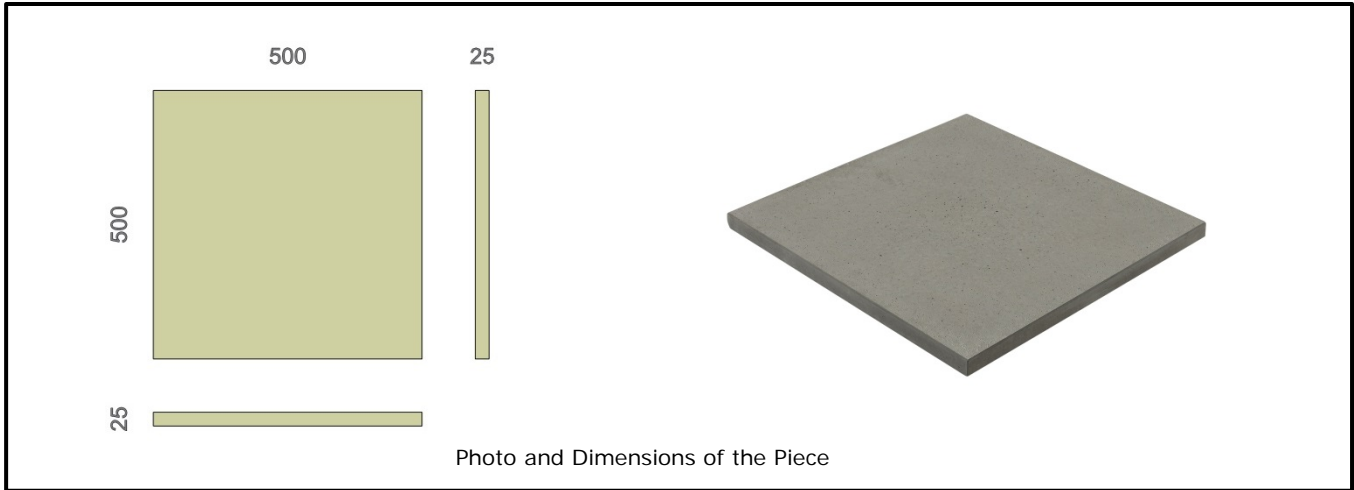

Available Colors



Product characteristics and package		Technical Specifications		
		EN 1339 – "Concrete paving flags – Requirements and test methods"		
		Intended use	Internal Flooring	External Flooring
Dimensions	500 x 500 x 25	Emission of asbestos	Pass	Not Relevant
Quantity per Pallet	20 sqm	Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Quantity per sqm	4 units	Slip/ Skid Resistance	Satisfactory	Satisfactory
Items/Pallet	80 units	Thermal Conductivity [W/(mk)]	1,24	Not Relevant
Average weight/Items	13,75 kg	External fire performance	Not Relevant	Not Relevant
Average weight/sqm	55 kg	Durability	Satisfactory	Satisfactory
Average weight/Pallet	1106 kg	Reaction to fire	Classe A1	Not Relevant
Approved Vitor Silva	Elaborate Bruno Veloso	PTDS n°: PAV_951_EN	Date 26-09-2019	