

### IMITATION DECK 1000x200x30 (MOD. 580)

units: mm



Piece Dimensions

Piece Photo




MOD.580/7

Product characteristics and package		Technical Specifications		
<b>Colors Available</b>		EN 1339 – "Concrete paving flags – Requirements and test methods"		
<b>Dimensions</b>	1000x200x30	<b>Intended use</b>	<b>Internal Flooring</b>	<b>External Flooring</b>
<b>Quantity per Pallet</b>	11,60 sqm	<b>Emission of asbestos</b>	Pass	Not Relevant
<b>Items/sqm</b>	5 units	<b>Breaking Strength (MPa)</b>	≥ 3,5	≥ 3,5
<b>Items/Pallet</b>	58 units	<b>Slip/ Skid Resistance</b>	Satisfactory	Satisfactory
<b>Average weight/Item</b>	13,8 kg	<b>Thermal Conductivity [W/(mk)]</b>	1,24	Not Relevant
<b>Average weight/sqm</b>	69 kg	<b>External fire performance</b>	Not Relevant	Not Relevant
<b>Average weight/Pallet</b>	806 kg	<b>Durability</b>	Satisfactory	Satisfactory
<b>Approved</b> Vitor Silva	<b>Elaborate</b> Bruno Veloso	<b>Reaction to fire</b>	Classe A1	Not Relevant
		<b>PTDS n°:</b> DECK_001_EN	<b>Date</b> 21/01/2020	

### IMITATION DECK 1000x200x30 (MOD. 579)

units: mm

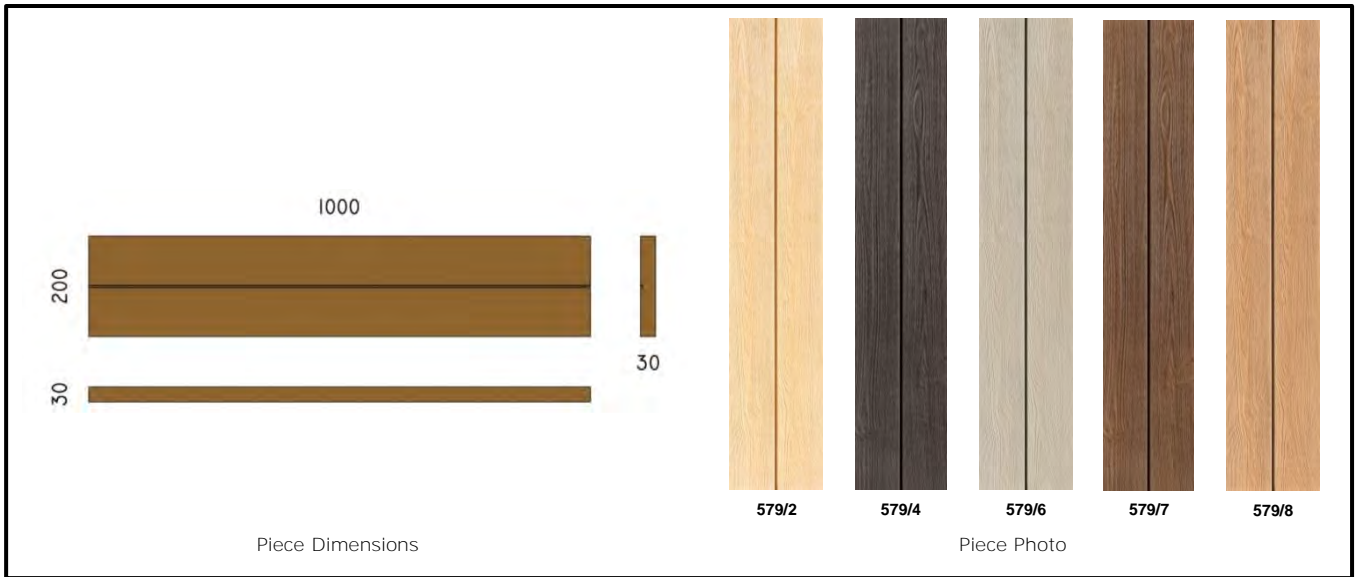

Piece Dimensions

Piece Photo




MOD.579/4

Product characteristics and package		Technical Specifications		
		EN 1339 – “Concrete paving flags – Requirements and test methods”		
Colors Available		Intended use	Internal Flooring	External Flooring
Dimensions	1000x200x30	Emission of asbestos	Pass	Not Relevant
Quantity per Pallet	11,60 sqm	Breaking Strength (MPa)	≥ 3,5	≥ 3,5
Items/sqm	5 units	Slip/ Skid Resistance	Satisfactory	Satisfactory
Items/Pallet	58 units	Thermal Conductivity [W/(mk)]	1,24	Not Relevant
Average weight/Item	13,8 kg	External fire performance	Not Relevant	Not Relevant
Average weight/sqm	69 kg	Durability	Satisfactory	Satisfactory
Average weight/Pallet	806 kg	Reaction to fire	Classe A1	Not Relevant
Approved Vitor Silva	Elaborate Bruno Veloso	PTDS nº: DECK_002_EN	Date 21/01/2020	

**TRAVE SOALHO 3 FORMATS (MOD. 577)**

units: mm

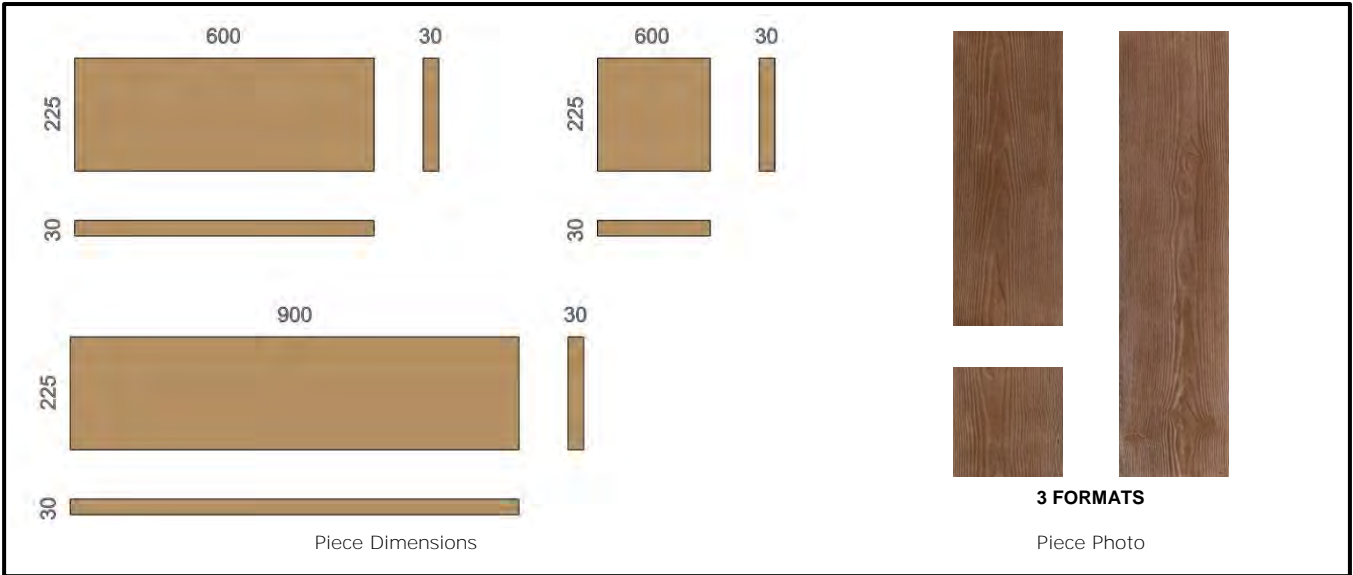

Product characteristics and package		Technical Specifications		
<p><b>Colors Available</b> 577/2  577/4  577/7  577/8 </p>		<p><b>EN 1339 – "Concrete paving flags – Requirements and test methods"</b></p>		
<b>Dimensions (3 Formats)</b>	900x225   600x225   225x225 thickness 30	<b>Intended use</b>	<b>Internal Flooring</b>	<b>External Flooring</b>
<b>Quantity per Pallet</b>	16,38 sqm	<b>Emission of asbestos</b>	Pass	Not Relevant
<b>Quantity per Module</b>	0,39 sm	<b>Breaking Strength (MPa)</b>	≥ 3,5	≥ 3,5
<b>Items/Pallet</b>	42 modules	<b>Slip/ Skid Resistance</b>	Satisfactory	Satisfactory
<b>Average weight/Module</b>	27,3 kg	<b>Thermal Conductivity [W/(mk)]</b>	1,24	Not Relevant
<b>Average weight/sqm</b>	66 kg	<b>External fire performance</b>	Not Relevant	Not Relevant
<b>Average weight/Pallet</b>	1092 kg	<b>Durability</b>	Satisfactory	Satisfatório
<b>Approved</b> Vitor Silva	<b>Elaborate</b> Bruno Veloso	<b>Reaction to fire</b>	Classe A1	Not Relevant
		<b>PTDS nº:</b> SOA3_001_EN	<b>Date</b> 09-09-2016	